

A

Practitioner's Docket No. 283P263

PATENT

NEW APPLICATION TRANSMITTAL

I hereby certify that this paper is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 addressed to **Box Patent Application, Assistant Commissioner for Patents, Washington, D.C. 20231** on **October 4, 1999** under "EXPRESS MAIL" mailing label number **EX 26024 2027 US**.

Janet M. Stevens
Janet M. Stevens

Box Patent Application
Assistant Commissioner for Patents
Washington D.C. 20231

Transmitted herewith for filing is the patent application of:

Inventor 1: Charles P. Barber
Address: 5004 Lakeview Drive, Fayetteville, NY 13066

Inventor 2: Carl W. Gerst III
Address: 80 East Genesee Street, Skaneateles, NY 13152

Inventor 3: Vivian L. Hunter
Address: 3732 Inclination Drive, Baldwinsville, NY 13027

Inventor 4: Melvin D. McCall
Address: 5481 East Homer-Baltimore Road, Homer, NY 13077

Inventor 5: Bruce L. Hahn
Address: 433 Westbrook Hills Drive, Syracuse, NY 13215

Title: IMAGE CAPTURE MODULE FOR OPTICAL READER

1. Papers enclosed

A. Required for filing date under 37 CFR 1.53(b) (Regular) are:

- 20 Page(s) of Specification
- 9 Page(s) of Claims
- 1 Page(s) of Abstract
- 7 Sheets of Informal Drawings (Figs. 1A - 2I)

2. Additional Papers to Follow Under Separate Cover

- ☒ A combined Declaration and Power of Attorney
☒ An Information Disclosure Statement
☒ PTO Form-1449
☒ An Assignment Transmittal and Assignment of the invention to
Welch Allyn Data Collection, Inc.
☐ ___ Sheets of Formal Drawings (Figs.) (in triplicate)

3. The filing fee has been calculated as shown below:

- A. Filing Fee
- ☒ Original Patent Application \$ 760.00
(37 C.F.R. 1.16(a) --\$760.00; Small Entity--\$380.00)
- B. Fees for Claims (Claims; Indep.)
- ☐ each independent claim in excess of 3
(37 C.F.R. 1.16(b)--\$78.00; small entity--\$39.00) \$ 0.00
- ☐ each claim in excess of 20
(37 C.F.R. 1.16(c)--\$18.00; small entity--\$9.00) \$ 144.00
- ☐ multiple dependent claim(s)
(37 C.F.R. 1.16(d)--\$260.00; small entity--\$130.00) \$ 0.00
- Total Fees Due \$ 904.00**

4. Payment of Fees and Authorization to Charge Additional Fees or Credit Overpayment

- ☒ A check in the amount of \$904.00 is enclosed.
☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 50-0289. A duplicate copy of this sheet is enclosed.
☒ Any additional filing fees required under 37 CFR 1.16.
☒ Any patent application processing fees under 37 CFR 1.17.

Respectfully submitted,

October 4, 1999

Date

George S. Blasiak

George S. Blasiak

Reg. No. 37,283

GSB:jms

WALL MARJAMA BILINSKI & BURR
 101 South Salina Street, Suite 400
 Syracuse, NY 13202
 Telephone: (315) 425-9000
 Facsimile: (315) 425-9114

Customer No.: 20874

Imaging Module for Optical Reader

Field of the Invention

The present invention relates to optical reading devices in general and in particular to an apparatus for packaging illumination optical elements, receive optical elements, and
5 signal processing elements of an optical reader.

Background of the Invention

Currently available optical readers include illumination elements, electronic signal processing, image capture and
10 decoding circuitry that are carried by more than one circuit board. For, example, shown in U.S. Pat. No. 5,780,834 is an optical reader having numerous circuit boards, including an LED board for carrying illumination LED'S, an "imaging board" carrying an image sensor and circuitry for processing signals
15 generated from the image sensor, and a "mother board" carrying image capture and decoding circuitry.

Assembly of the multiple circuit board arrangement of the prior art is time consuming and expensive. Assembly of a prior art reader requires mounting of separate circuit boards to
20 separate internal structures of a reader, and providing electrical connection between the multiple circuit boards. In addition adding to being difficult to assemble, the multiple circuit board design imposes size requirements on the optical reader housing in which the electrical components are to be
25 integrated.

There is a need for an improved packaging method and apparatus for packaging optical and electrical components of an optical reader.

Summary of the Invention

According to its major aspects and broadly stated the present invention is a module for packaging optical illumination, optical receive, and electrical signal processing components of an optical reader.

The module includes a frame which carries a printed circuit board, preferably a printed circuit board (PCB) and various optical components. In one embodiment, the frame includes a back plate having a retainer for receiving an optical lens barrel, and a recess for receiving and aligning an image sensor which is carried by the PCB. The frame may also include resilient fingers which enable the frame to receive certain optical components of the module in an adhesiveless snap-fitting arrangement.

According to a preferred assembly method for assembling the module, the PCB is first mounted onto the frame's back plate such that the image sensor of the PCB is received and aligned by the recess of the back plate. Next, illumination and aiming LED's are soldered to the PCB to mount the LED's. As a space conserving measure, the LED's may be mounted so that a portion of rear surfaces of the illumination LED's oppose a portion of the top surface of the image sensor when mounted.

After the LED's are mounted to the PCB, additional components are incorporated in the module. In a preferred embodiment, a lens barrel is incorporated in the retainer, then an aperture plate having domed apertures for shaping light rays emanating from the aiming LED's is placed over the LED's. Finally, a diffuser lens plate for diffusing light rays emanating from the illumination LED's is snap-fit into

the frame. By providing spacers between the aperture plate and the diffuser plate, both of the aperture plate and the diffuser plate are secured in a stationary position inside the module by snap fitting of the diffuser plate onto the frame
5 without use of adhesives or any other mechanical securing apparatuses.

In addition to having diffusers for diffusing illumination light, the diffuser plate may also include lenses for focusing light generated by the aiming LED's. In one
10 embodiment of the invention, the aiming LED's and their associated optics project a solitary horizontal aiming line onto a target in a field of view.

The printed circuit board may be a full function printed circuit board which carries a solid state image sensor and
15 essentially the entirety of electronic circuitry required for supporting essentially all of the processing and control operations to be performed by the optical device in which the module is to be incorporated. Circuitry incorporated in the single PCB includes signal processing circuitry for processing
20 signals generated from the image sensor, image capture circuitry for storing image data, and decoding and/or recognizing circuitry for decoding and/or recognizing indicia represented in image data that has been stored.

In order to accommodate the full function circuit board,
25 the rear surface of the frame's back plate should be made to have a central recess for aligning and receiving the image sensor, and peripheral recesses for accommodating circuit elements such as electrical components and/or wiring which may emanate from the front surface of the full function printed
30 circuit board.

The complementary components of the module are shaped so that the completed module exhibits a cubic rectangular form, thereby reducing the overall volume consumed by the entirety of optical components and at least the image sensing component of the reader in which the module is installed.

A major feature of the invention is the incorporation of essentially all of the illumination elements required of an optical reader, including illumination and aiming light sources, and an image sensor onto a single circuit board. This significantly simplifies assembly, reduces material consumption, and thereby reduces the overall cost of producing the module.

Another feature of the invention is the snap fitting arrangement between the plate components of the module and the frame. The snap fitting arrangement for mounting several components of the frame eliminates the need for adhesives or other mechanical mounting agents, simplifies assembly, and thereby further reduces costs.

Another feature of the invention is the positioning of the LED's to partially oppose the image sensor when mounted. This feature reduces the required overall size of the module, thereby allowing incorporation of the module into smaller readers and further reducing costs.

Still another feature of the invention, in one embodiment, is the incorporation of essentially the entirety of electronic circuitry components required for essentially all of the signal processing and control operations required of the optical reader in which the module is to be incorporated in a single PCB. This feature enables essentially all of the electrical component required of an

optical device in which the module is to be incorporated to be installed simply by installing the module in the device.

Another feature of the invention is the projection of a solitary horizontal aiming line by the module's aiming LED's and their associated optics. The projection of a solitary horizontal aiming line for aiming reduces the space requirements of the aiming optics and reduces costs.

Yet another feature of the invention is the packaging of the entirety of the optical elements and at least the image sensor of the electrical components of an optical reader into a packaged module having a rectangular cube configuration. The rectangular cube configuration is stackable and highly space efficient and as such, enables simplified transport of the module and installation of reader optical and electrical components into reader housings of smaller size than was previously possible.

In addition to minimizing the size of the module, the module's configuration provides protection for internal components. The module's closed wall configuration provides a containment for internal components of the module, and substantially prevents outside objects from coming in contact with sensitive internal components of the module such as the module's image sensor and LED's.

These and other details, advantages and benefits of the present invention will become apparent from the detailed description of the preferred embodiment herein below.

Brief Description of the Drawing

For a fuller understanding of the nature and objects of the invention, reference should be made to the following

detailed description of a preferred mode of practicing the invention, read in connection with the accompanying drawings, in which:

Fig. 1A is a front perspective assembly diagram

5 illustrating assembly of an image capture module according to the invention;

Fig. 1B is a rear perspective assembly diagram

illustrating assembly of an image capture module according to the invention;

10 Fig 1C is a front perspective view of an assembled image capture module according to the invention;

Fig. 1D is a rear perspective view of an assembled image capture module according to the invention;

Fig. 1E is a representation of a preferred illumination
15 and **aiming** pattern projected by a module in accordance with the invention;

Fig. 1F is a block diagram for illustration of functional and control features of the invention;

Fig. 2A - 2E are perspective views of various optical
20 reader housings in which the invention may be incorporated;

Fig. 3 is a side view of a prior art reader illustrating a prior art multiple circuit board arrangement.

Detailed Description of the Invention

25 An embodiment of an imaging module 10 according to the invention is shown in Figs. 1A through 1D. Imaging module 10 is specifically designed for use in an indicia reader such as a bar code reader, an optical character recognition (OCR) reader or in a reader having both bar code and OCR
30 reading capabilities. However, it will be understood that

features of module 10 may also find use in other devices requiring image capture including video cameras, digital cameras, and medical viewing instruments.

Module 10 includes mounting frame 12 which is adapted to receive both electrical components and optical components of an imaging system. Specifically, mounting frame 12 receives a circuit board, shown as being provided by a printed circuit board (PCB) 14, illumination LED's 16, aiming LED's 18, an aiming lens aperture plate 24 and diffuser plate 26. LED's 16, 18 could be substituted for by such light sources as laser diodes, filament based lamps, other solid state light sources, and fiber optic illumination devices.

Referring now to specific attributes of frame 12, frame 12 includes a back plate 30 and sidewalls including top 15 sidewalls 31 and side sidewalls 31'. Back plate 30 includes a recess 34 for receiving a solid state image sensor chip 32 and, in one embodiment, a plurality of pin holes 36 for receiving leads 38 of illumination and/or aiming light sources, normally provided by LED's 16, 18. Back plate 30 may further include a retainer 40 for receiving a receive optics lens assembly 41 shown as being provided by a lens barrel, which may be installed in retainer 40 prior to or after any step in the assembly process which will be described herein below.

In assembling module 10, an assembler may first mount PCB 14 to back plate 30 with use of screws 56 or adhesives and then orients frame 12 so that opening 13 is exposed. When PCB 14 is mounted to back plate 30, image sensor 32 carried by PCB 14, is received and aligned by center recess 34 which is shaped complementarily with the shape of image sensor 32 as

shown. After mounting PCB 14 to frame 12, an assembler mounts illumination LED's 16 and aiming LED's 18 to PCB 14.

To mount LED's 16, 18 to PCB 14, an assembler pushes leads 38 of LED's 16, 18 through aligned pin holes 36 and 54 of back plate 30 and PCB 14, then solders the LED's 16, 18 to PCB 14. Preferably, an assembler first positions all of the LED's 16, 18 in their respective pin holes before soldering any of them. In soldering LED's 16, 18 rear surface 15 of PCB 14 should face in an orientation where it is easily accessed by an assembler. To the end that LED's 16, 18 remain in their desired orientation substantially normal to PCB 14 during soldering, a fixture (not shown) shaped to receive LED's 16, 18, of the type well known to persons skilled in the optical module assembly art can be temporarily applied over LED's 16, 18 through the soldering process.

While back plate 30 of frame 12 is shown as having pin holes 36 it will be understood that the entire region of back plate 30 containing pin holes 36 and recess 34 could be eliminated leaving back plate 30 to consist essentially only of receive optical lens assembly retainer 40. In such an embodiment, a substantial portion of the front surface 15 of PCB 14 would be exposed to an assembler upon mounting of PCB 14 to frame 12. In the case that back plate 30 does not contain material defining pin holes 36, LED's 16, 18 may be front mounted to front surface 15 of a PCB which in such an embodiment would not require pin holes for receiving LED leads 38.

An important feature of the invention is that leads 38 of illumination LED's 16 are installed in a nearly abutting relation to sides 33 of image sensor 32 so that a portion of

rear surfaces 19 of LED's 16 oppose a portion of a front surface 33 of image sensor 32 when the LED's 16 are completely installed. This arrangement reduces the size of module 12, enabling it to be installed in smaller sized optical readers.

5 After LED's 16, 18 are mounted onto PCB 14, an assembler installs aperture plate 24 in frame 12 so that domes 42 of aperture plate 24 fit over aiming LED's 18. Domes 42 of aperture plate should be opaque to substantially block all light emanating from aiming LED's 18 except for light which
10 exits domes 42 through slit apertures 43. Slit apertures 43 should be formed so that a desired shaped aiming pattern of illumination is projected onto a target, T. Preferably, aperture slits 43 are shaped rectangularly so that a horizontal line pattern is projected onto a target.

15 Referring to further aspects of aperture plate 24, aperture plate 24 includes cutaway sections 46 which provide clearance to allow plate 24 to be fit over illumination LED's 16. The sidewalls of domes 42 and of cutaway sections 46 may or may not contact the LED's they fit over. However, it is
20 not necessary that the sidewalls of either domes 42 or cutaway sections 46 have any influence on the alignment or LED's 16, 18 since LED's 16, 18 are aligned in their desired orientation substantially normal to the surface 33 of image sensor 32 and PCB 14 by virtue of the fact that they are held in a desired
25 orientation while being soldered and, in the embodiment shown, by virtue fact that the flat surfaces of LED bases 17 are biased against the flat surface of back plate 30 during the assembly process.

After aperture plate 24 is placed over LED's 16, 18 and
30 moved toward back plate 30, diffuser plate 26 is snap fit into

frame opening 13 of frame 12. Diffuser plate 26 includes diffusers 27 for diffusing light emanating from illumination LED's so that a target area, T, is substantially homogeneously illuminated by light emanating from illumination LED's 16.

5 Resilient fingers 48 having hook ends 49 may be formed in top 31 or side 31 sidewalls of frame 12 to enable snap fitting of plate 26 onto frame 12. In the embodiment shown, an assembler snap fits plate 26 onto frame 12 by pulling back resilient fingers 48 and pushing plate 26 toward back plate 30 then
10 releasing fingers 48 to lock plate 26 into a position inside module 10. Spacers 52 of aperture plate 24 (which in the alternative may be formed on plate 26) operate to bias aperture plate 24 toward back plate 30 when diffuser plate 26 is snap fit onto frame 12. When plate 26 is snap fit into
15 frame 12, spacers 52 transfer the force imparted by fingers 48 on plate 26 to plate 24 to the end that both aperture plate 24 and diffuser plate 26 are firmly secured inside frame 12 without use of adhesives or outside mechanical securing apparatuses or agents such as screws or pins.

20 In addition to having diffusers 27 for diffusing light emanating from illumination LED's 16, diffuser plate 26 may also include lenses 25 for focusing light emanating from aiming LED's 18 as shaped by aperture slits 43 so that a focused narrow line is projected onto a target area T. A
25 representation of a preferred illumination pattern projected by the illumination system of module 10 is shown in Fig. 1E. In Fig. 1E, area 72 represents the region of a target area T illuminated by illumination LED's 16 while area 74 represents the region of the target area highlighted by aiming LED's 18
30 and their associated optics. It is seen that aiming LED's 18

and their associated optics preferably project a solitary horizontal line 74 onto a target area which is in contrast with the complex geometry aiming patterns of prior art 2D optical readers. The selection of a solitary horizontal
5 aiming pattern reduces the size of module 10, as it eliminates the need to provide more than 2 light sources and/or optics for reflecting light generated from the aiming pattern light source or sources.

An important feature of the invention is that essentially
10 all the illumination elements of a reader in which module 10 is to be incorporated are included on a single circuit board shown as being provided by PCB 14. This is in contrast to the design of the prior art reader shown in Fig. 3 in which illumination elements and image sensing elements are spread
15 out over several circuit boards. In the prior art device shown in Fig. 3, an aiming illumination source 53 is mounted to a first circuit board 54, illumination LED's are mounted to a second circuit board 56, while image sensor 32 is mounted to a third circuit board 58. The assembly of a module of this
20 prior art design is difficult and requires material components not required by the design of the present invention including circuit boards 54, 56 and electrical connectors between the circuit boards such as connector 57. Providing a single circuit board that carries an image sensor, illumination
25 LED's, and aiming LED's significantly simplifies assembly, reduces material consumption and thereby reduces the overall cost of producing the module.

Another important aspect of the invention, in one embodiment, is that essentially all electronic circuitry
30 supporting the data processing operations required of module

10 are located on single, full function PCB 14, including
circuitry for processing signals generated from image sensor
32, circuitry for capturing image data into a memory device,
circuitry for decoding and/or recognizing indicia represented
5 in captured image data. Circuitry for supporting serial
transfers of data to peripheral devices may also be carried by
PCB 14.

The all in one PCB arrangement of the present invention
is in contrast to the traditional design in the prior art
10 wherein circuitry for processing signals from an image sensor,
circuitry for capturing and decoding image data and circuitry
supporting serial interfacing with external devices are spread
out over more than one circuit board.

In the design of the prior art reader shown in Fig. 3, a
15 first vertically oriented circuit board 56 is provided for
carrying circuitry for processing signals generated by an
image sensor 32 and a second horizontally oriented circuit
board 60, known as a "mother board" is provided for carrying
circuitry for storing image data and for decoding
20 symbologies.

The one PCB design of the present invention provides
numerous advantages over the two PCB design of the prior art.
The multiple circuit board arrangement of the prior art
requires a complex assembly procedure wherein the first
25 circuit board 58 is mounted to a first internal structure of
the reader in which it is incorporated, the second circuit
board is mounted to a second internal structure of the reader,
and then the two circuit board are electrically connected.
The separate horizontal and vertical orientations of the two
30 circuit boards 58, 60 is inefficient in terms of space

consumption and imposes restrictions on the configurations of housings in which the reader optical and electrical components may be incorporated. The one full function PCB design of the present invention does not exhibit these disadvantages.

5 To the end that essentially the entirety of the required electronic circuitry of an optical reader can be packaged into a single printed circuit board, the back surface of the frame's back plate 30 should be configured to accommodate electrical components that will extend forward from the front
10 surface 15 of PCB 14. Accordingly it is seen that the rear surface of back plate 30 includes a central recess 34 for aligning and receiving solid state image sensor 32 and peripheral recesses 35 for accommodating electrical circuitry such as components and/or conductors which may protrude from
15 the front surface of PCB 14.

In addition to the features that have been described herein above, it will be seen that additional benefits are yielded by features relating to the overall shape and configuration of module 10. As best seen in Figs. 1C and 1D,
20 sidewalls 31 and 31' of frame 10, together with PCB 14 and plate 26 define a module having a substantially cubic rectangular overall form. The cubic rectangular form is highly space efficient relative to the form of optical reader imaging modules in the prior art. With reference again to
25 Fig. 3 it is seen that the form of prior art imaging module 52 is highly irregular in that it contains members such as member 53 and member 56 that protrude extraneously from the major body of module 52. The volume conserving cubic rectangular configuration of the module of the present invention
30 facilitates incorporation of the module into optical reader

housings of smaller interior volume than was possible with the irregular imaging module designs of the prior art.

The volume conserving cubic rectangular form of module, in addition to facilitating incorporation of the module into a smaller volume optical reader housings, renders the module easier to package. This is because the cubic rectangular form allows several modules to be stacked neatly on top of one another allowing more modules to be packaged in a certain sized container than was possible with modules of previous designs. The stackability of the modules also allows the modules to be packaged more securely without outside securing agents such as bubble paper and/or foam particles, since several modules can be packed in such a way that several modules impart stabilizing tensioning forces on one another.

15 Packaging of several modules in a box or container containing several modules is an important consideration in the case that several modules 10 are to be transported from a first location where they are assembled to a second location where they are to be incorporated into several optical reader housings.

20 Another feature relating to the outer configuration of module 10, is that the defined outer walls of module 10 serve as a containment for protecting and preventing damage to relatively fragile and sensitive internal components of the module. In the prior art, with reference again to Fig. 3, it is seen that sensitive and fragile and sensitive components of module such as light source 53 and LED circuit board 56 extend extraneously from the major body of the module and as such, are susceptible to being brought in contact with external objects especially during transport and during installation of the module into a reader housing. In the embodiment shown in

Figs. 1A - 1D, substantially all fragile sensitive components, including all light sources of module 10, and image sensor 32, are disposed inside a substantially rigid containment structure defined by sidewalls 31, 31' and PCB 12 and the combination of sidewalls 31, 31' and diffuser plate 26.

The substantially rigid containment of sensitive internal components of the module provided by the combination of sidewalls 31, 31' and PCB 14 and/or the combination of sidewalls 31, 31' and diffuser plate 26 eliminate the need to package the module with shock absorbing material such as bubble paper or foam particles during transport and allows the module to be safely transported from one location to another without substantial risk of damage to sensitive internal components.

Methods for making, and possible material compositions for various components of imaging modules are discussed in commonly assigned U.S. Serial No. 09/312,479 incorporated herein by reference.

A block diagram illustrating one type of optical reading device in which the invention may be incorporated is described with reference to Fig. 1F.

Optical reader 110 includes an illumination assembly 120 for illuminating a target object T, such as a 1D or 2D bar code symbol, and an imaging assembly 130 for receiving an image of object T and generating an electrical output signal indicative of the data optically encoded therein. Illumination assembly 120 may, for example, include an illumination source assembly 122, such as one or more LEDs, together with an illuminating optics assembly 124, such as one or more reflectors, for directing light from light source 122 in the

direction of target object T in module 10. The illumination assembly in the embodiment of Figs. 1A - 1D is provided entirely by LED's 16. Illumination assembly 120 may be eliminated if ambient light levels are certain to be high enough to allow high quality images of object T to be taken. Imaging assembly 130 may include an image sensor 132, such as a 1D or 2D CCD, CMOS, NMOS, PMOS, CID OR CMD solid state image sensor, together with an imaging optics assembly 134 for receiving and focusing an image of object T onto image sensor 10 132. The array-based imaging assembly shown in Fig. 1F may be replaced by a laser array based imaging assembly comprising multiple laser sources, a scanning mechanism, emit and receive optics, at least one photodetector and accompanying signal processing circuitry.

15 Optical reader 110 of Fig. 1F also includes programmable control unit 140 which preferably comprises an integrated circuit microprocessor 142 and an application specific integrated circuit (ASIC 144). The function of ASIC 144 could also be provided by field programable gate array (FPGA).

20 Processor 142 and ASIC 144 are both programmable control devices which are able to receive, output and process data in accordance with a stored program stored in memory unit 145 which may comprise such memory elements as a read/write random access memory or RAM 146 and an erasable read only memory or

25 EROM 147. RAM 146 typically includes at least one volatile memory device but may include one or more long term non-volatile memory devices. Processor 142 and ASIC 144 are also both connected to a common bus 148 through which program data and working data, including address data, may be received and

30 transmitted in either direction to any circuitry that is also

connected thereto. Processor 142 and ASIC 144 differ from one another, however, in how they are made and how they are used.

More particularly, processor 142 is preferably a general purpose, off-the-shelf VLSI integrated circuit microprocessor 5 which has overall control of the circuitry of Fig. 2, but which devotes most of its time to decoding image data stored in RAM 146 in accordance with program data stored in EROM 147. Processor 144, on the other hand, is preferably a special purpose VLSI integrated circuit, such as a programmable logic 10 or gate array, which is programmed to devote its time to functions other than decoding image data, and thereby relieve processor 142 from the burden of performing these functions.

The actual division of labor between processors 142 and 144 will naturally depend on the type of off-the-shelf 15 microprocessors that are available, the type of image sensor which is used, the rate at which image data is output by imaging assembly 130, etc. There is nothing in principle, however, that requires that any particular division of labor be made between processors 142 and 144, or even that such a 20 division be made at all. This is because special purpose processor 144 may be eliminated entirely if general purpose processor 142 is fast enough and powerful enough to perform all of the functions contemplated by the present invention. It will, therefore, be understood that neither the number of 25 processors used, nor the division of labor therebetween, is of any fundamental significance for purposes of the present invention.

With processor architectures of the type shown in Fig. 1F, a typical division of labor between processors 142 and 144 30 will be as follows. Processor 142 is preferably devoted

primarily to such tasks as decoding image data, once such data has been stored in RAM 146, recognizing characters represented in stored image data according to an optical character recognition (OCR) scheme, handling menuing options and reprogramming functions, processing commands and data received from control/data input unit 139 which may comprise such elements as trigger 174 and keyboard 178 and providing overall system level coordination. Processor 144 is preferably devoted primarily to controlling the image acquisition process, the A/D conversion process and the storage of image data, including the ability to access memories 146 and 147 via a DMA channel. Processor 144 may also perform many timing and communication operations. Processor 144 may, for example, control the illumination of LEDs 122, the timing of image sensor 132 and an analog-to-digital (A/D) converter 136, the transmission and reception of data to and from a processor external to reader 110, through an RS-232, a network such as an ethernet, or a serial bus such as USB, (or other) compatible I/O interface 137 and the outputting of user perceptible data via an output device 138, such as a beeper, a good read LED and/or a display monitor which may be provided by a liquid crystal display such as display 182. Control of output, display and I/O functions may also be shared between processors 142 and 144, as suggested by bus driver I/O and output/display devices 137' and 138' or may be duplicated, as suggested by microprocessor serial I/O ports 142A and 142B and I/O and display devices 137" and 138'. As explained earlier, the specifics of this division of labor is of no significance to the present invention.

In accordance with a feature of one embodiment of the

invention described with reference to Figs. 1A-1D, essentially all of the electrical signal processing components described with reference to Fig. 1F may be carried by a single circuit board, PCB 14, as is indicated by dashed-in border 14, of Fig. 1F. In order to incorporate essentially all of the electrical signal processing components of Fig. 1E onto a single PCB 14, it is normally necessary to integrate several electrical components into a reduced number of electrical components. For example, using known integrated circuit fabrication techniques, components 142, 144, 146, and 147 and interfaces 137, 137', and 137" can be incorporated in a single integrated circuit chip of reduced size. Further, as explained in an article by Eric R. Fossum entitled *Digital Camera System on a Chip*, IEEE Computer Society (IEEE Micro), Volume 18, Number 3, May/June 1998, image sensor 132, signal processing components 135, 136, and components 142, 144, 146, 147, 137, 137', and 137" may be incorporated in a single integrated circuit of reduced size.

Figs. 2A through 2H show examples of types of housings in which the present invention may be incorporated. Figs 2A and 2B show a 1D optical reader 110-1, while Figs 2C-2H show 2D optical readers 110-2, 110-3, 110-4. Housing 112 of each of the optical readers 110-1 through 110-4 has incorporated therein is adapted to be graspable by a human hand and at least one trigger switch 174 for activating image capture and decoding and/or image capture and character recognition operations. Readers 110-1, 110-2, 110-3 include hard-wired communication links 178 for communication with external devices such as other data collection devices or a host processor, while reader 110-4 includes an antenna 180 for

providing wireless communication with an external device such as another data collection device or a host processor.

In addition to the above elements, readers 110-3 and 110-4 each include a display 182 for displaying information to a user and a keyboard 184 for enabling a user to input commands and data into the reader.

Any one of the readers described with reference to Figs. 2A through 2H may be mounted in a stationary position as is illustrated in Fig. 2I showing a generic optical reader 110 docked in a scan stand 190. Scan stand 190 adapts portable optical reader 110 for presentation mode scanning. In a presentation mode, reader 110 is held in a stationary position and an indicia bearing article is moved across the field of view of reader 110.

15 While this invention has been described in detail with reference to a preferred embodiment, it should be appreciated that the present invention is not limited to that precise embodiment. Rather, in view of the present disclosure which describes the best mode for practicing the invention, many
20 modifications and variations would present themselves to those skilled in the art without departing from the scope and spirit of this invention, as defined in the following claims.

What is claimed is:

1 1. An imaging module comprising:
2 a frame;
3 a circuit board mounted to said frame;
4 an image sensor carried by said circuit board; and
5 at least one illumination light source for illuminating a
6 target area.

1 2. The imaging module of claim 1, wherein said at least
2 one illumination light source is mounted to said circuit
3 board, whereby said circuit board carries both of said image
4 sensor and said at least one illumination light source.

1 3. The imaging module of claim 1, wherein said imaging
2 module further includes at least one aiming light source, and
3 wherein said at least one illumination light source and said
4 at least one aiming light source are each mounted to said
5 circuit board, whereby said circuit board carries each of said
6 image sensor, said at least one illumination light source and
7 said at least one aiming light source.

1 4. The imaging module of claim 1, further comprising at
2 least one planar optical component and wherein said frame
3 comprises sidewalls having resilient fingers formed therein
4 for receiving and securing said optical component in said
5 frame in a stationary position in said frame without use of
6 adhesives or any additional mechanical securing apparatuses or
7 agents.

1 5. The imaging module of claim 1, wherein said circuit
2 board carries essentially all image sensor signal processing
3 circuitry, image capture circuitry, and decoding and or
4 recognizing circuitry of an optical reader in which said
5 module is to be installed.

1 6. The imaging module of claim 1, wherein said image
2 sensor is a 2D image sensor and wherein said module further
3 includes at least one aiming light source and associated
4 optics for projecting a solitary horizontal line aiming
5 pattern in a target area.

1 7. The imaging module of claim 1, wherein said frame
2 defines top and side sidewalls of said module, and wherein
3 said sidewalls and said circuit board define a cubic
4 rectangular configuration.

1 8. The imaging module of claim 1, wherein said frame
2 includes substantially rigid top and side sidewalls defining a
3 partially enclosed contained area, and wherein said at least
4 one illumination source is disposed inside said contained
5 area, whereby said at least one illumination source is
6 structurally protected by said frame.

1 9. The imaging module of claim 1, wherein said frame
2 includes substantially rigid top and side sidewalls defining a
3 partially enclosed contained area, and wherein said at least
4 one illumination source and said image sensor are disposed
5 inside said contained area, whereby said at least one
6 illumination source and said image sensor are structurally
7 protected by said frame.

1 10. The imaging module of claim 1, wherein said frame
2 includes substantially rigid top and side sidewalls, and
3 wherein a combination of said circuit board and said top and
4 side sidewalls defines a partially enclosed contained area,
5 and wherein said at least one illumination source is disposed
6 inside said contained area, whereby said at least one
7 illumination source is structurally protected by a combination
8 of said circuit board and said frame.

1 11. The imaging module of claim 1, wherein said frame
2 includes substantially rigid top and side sidewalls and
3 wherein a combination of said circuit board and said top and
4 side sidewalls defines a partially enclosed contained area,
5 and wherein said at least one illumination source and said
6 image sensor are disposed inside said contained area, whereby
7 said at least one illumination source and said image sensor
8 are structurally protected by a combination of said circuit
9 board and said frame.

1 12. The imaging module of claim 10 wherein essentially
2 an entirety of illumination sources of said module are
3 incorporated in said contained area.

1 13. The imaging module of claim 1, wherein said back
2 plate includes a center recess for receiving and aligning said
3 image sensor.

1 14. The imaging module of claim 1, wherein said back
2 plate includes a center recess for receiving and aligning said
3 image sensor and at least one side recess for accommodating
4 electrical components emanating forwardly of said circuit
5 board.

1 15. The imaging module of claim 1, further includes a
2 pair of aiming light sources, and an aperture plate having a
3 pair of apertured domes disposed over said light sources for
4 shaping light emanating from said aiming light sources.

1 16. The imaging module of claim 1, wherein said frame
2 includes a back plate, and wherein said at least one
3 illumination source further includes illumination and aiming
4 LED's having leads extending through said back plate and being
5 electrically connected to said circuit board.

1 17. The imaging module of claim 1, wherein said at least
2 one illumination source further includes illumination and
3 aiming LED's being electrically connected to said circuit
4 board, and wherein said module further comprises:
5 an aperture plate including domes having slit apertures
6 for shaping light emanating from said aiming LED's being fit
7 over said aiming LED's; and
8 a diffuser plate including optics for diffusing light
9 emanating from said illumination LED's being positioned in
10 said optical reader forward of said aperture plate.

1 18. The imaging module of claim 17, further including
2 means adapting said diffuser plate to be snap-fit onto said
3 frame.

1 19. The imaging module of claim 17, further comprising:
2 means adapting said diffuser plate to be snap-fit onto
3 said frame; and
4 means adapting said aperture plate to be biased toward

1 said back plate when said diffuser plate is snap-fit onto said
2 frame.

1 20. An imaging module comprising:
2 a frame;
3 a circuit board mounted to said frame;
4 an image sensor carried by said circuit board; and
5 at least one illumination light source for illuminating a
6 target area.

1 21. The optical reader of claim 20, wherein said at
2 least one illumination light source is mounted to said circuit
3 board, whereby said circuit board carries both of said image
4 sensor and said at least one illumination light source.

1 22. The optical reader of claim 20, wherein said imaging
2 module further includes at least one aiming light source, and
3 wherein said at least one illumination light source and said
4 at least one aiming light source are each mounted to said
5 circuit board, whereby said circuit board carries each of said
6 image sensor, said at least one illumination light source and
7 said at least one aiming light source.

1 23. The optical reader of claim 20, further comprising
2 at least one planar optical component and wherein said frame
3 comprises sidewalls having resilient fingers formed therein
4 for receiving and securing said optical component in said
5 frame in a stationary position in said frame without use of
6 adhesives or any additional mechanical securing apparatuses or
7 agents.

1 24. The optical reader of claim 20, wherein said
2 circuit board carries essentially all image sensor signal
3 processing circuitry, image capture circuitry, and decoding
4 and or recognizing circuitry of an optical reader in which
5 said module is to be installed.

1 25. The optical reader of claim 20, wherein said image
2 sensor is a 2D image sensor and wherein said module further
3 includes at least one aiming light source and associated
4 optics for projecting a solitary horizontal line aiming
5 pattern in a target area.

1 26. The optical reader of claim 20, wherein said frame
2 defines top and side sidewalls of said module, and wherein
3 said sidewalls and said circuit board define a cubic
4 rectangular configuration.

1 27. The optical reader of claim 20, wherein said frame
2 includes substantially rigid top and side sidewalls defining a
3 partially enclosed contained area, and wherein said at least
4 one illumination source is disposed inside said contained
5 area, whereby said at least one illumination source is
6 structurally protected by said frame.

1 28. The optical reader of claim 20, wherein said frame
2 includes substantially rigid top and side sidewalls defining a
3 partially enclosed contained area, and wherein said at least
4 one illumination source and said image sensor are disposed
5 inside said contained area, whereby said at least one
6 illumination source and said image sensor are structurally
7 protected by said frame.

1 29. The optical reader of claim 20, wherein said frame
2 includes substantially rigid top and side sidewalls, and
3 wherein a combination of said circuit board and said top and
4 side sidewalls defines a partially enclosed contained area,
5 and wherein said at least one illumination source is disposed
6 inside said contained area, whereby said at least one
7 illumination source is structurally protected by a combination
8 of said circuit board and said frame.

1 30. The optical reader of claim 20, wherein said frame
2 includes substantially rigid top and side sidewalls and
3 wherein a combination of said circuit board and said top and
4 side sidewalls defines a partially enclosed contained area,
5 and wherein said at least one illumination source and said
6 image sensor are disposed inside said contained area, whereby
7 said at least one illumination source and said image sensor
8 are structurally protected by a combination of said circuit
9 board and said frame.

1 31. The optical reader of claim 29 wherein essentially
2 an entirety of illumination sources of said module are
3 incorporated in said contained area.

1 32. The optical reader of claim A1, wherein said back
2 plate includes a center recess for receiving and aligning said
3 image sensor.

1 33. The optical reader of claim 20, wherein said back

1 plate includes a center recess for receiving and aligning said
2 image sensor and at least one side recess for accommodating
3 electrical components emanating forwardly of said circuit
4 board.

1 34. The optical reader of claim 20, further includes a
2 pair of aiming light sources, and an aperture plate having a
3 pair of apertured domes disposed over said light sources for
4 shaping light emanating from said aiming light sources.

1 35. The optical reader of claim 20, wherein said frame
2 includes a back plate, and wherein said at least one
3 illumination source further includes illumination and aiming
4 LED's having leads extending through said back plate and being
5 electrically connected to said circuit board.

1 36. The optical reader of claim 20, wherein said at
2 least one illumination source further includes illumination
3 and aiming LED's being electrically connected to said circuit
4 board, and wherein said module further comprises:
5 an aperture plate including domes having slit apertures
6 for shaping light emanating from said aiming LED's being fit
7 over said aiming LED's; and
8 a diffuser plate including optics for diffusing light
9 emanating from said illumination LED's being positioned in
10 said optical reader forward of said aperture plate.



1 37. The optical reader of claim 36, further including
2 means adapting said diffuser plate to be snap-fit onto said
3 frame.



1 38. The optical reader of claim 36, further comprising:
2 means adapting said diffuser plate to be snap-fit onto
3 said frame; and
4 means adapting said aperture plate to be biased toward
5 said back plate when said diffuser plate is snap-fit onto said
6 frame.


ABSTRACT





The present invention is an imaging module including a frame supporting various optical components and a circuit board, which, in one embodiment, carries essentially an entirety of illumination and aiming LED's of the module. The frame may include resilient fingers which enable the frame to receive certain optical components in a snap-fit arrangement. Further, the module may be arranged so that the outer walls of the module provide a containment for preventing structural damage to sensitive internal components of the module.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2

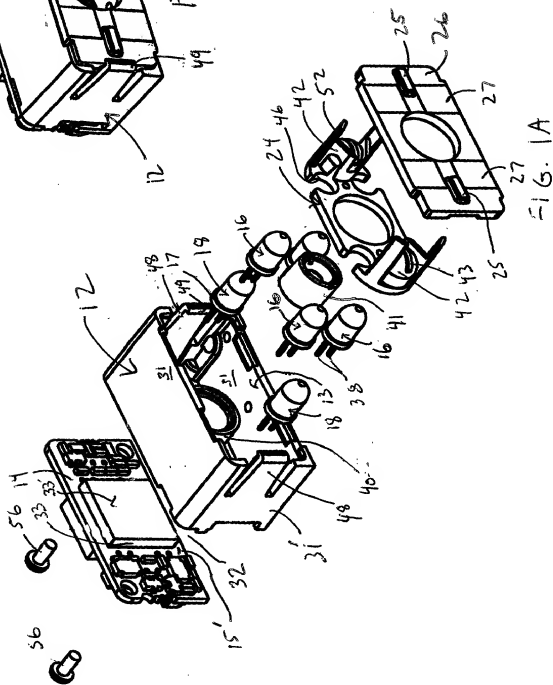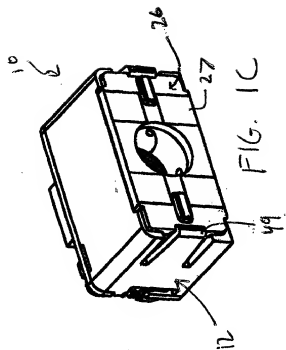

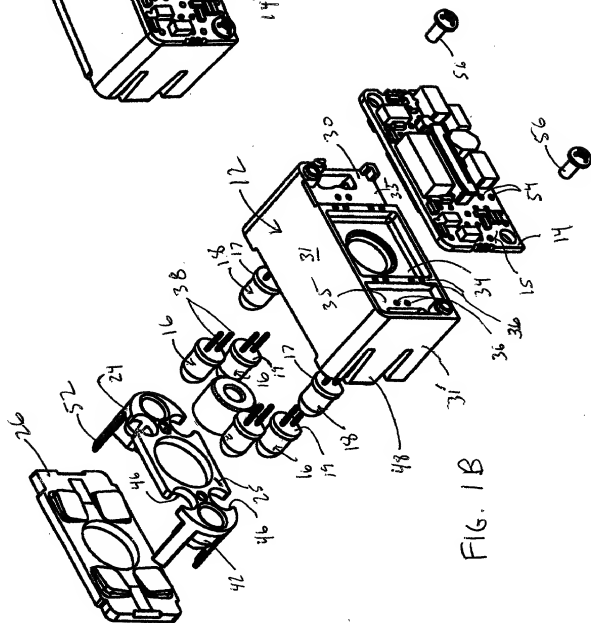

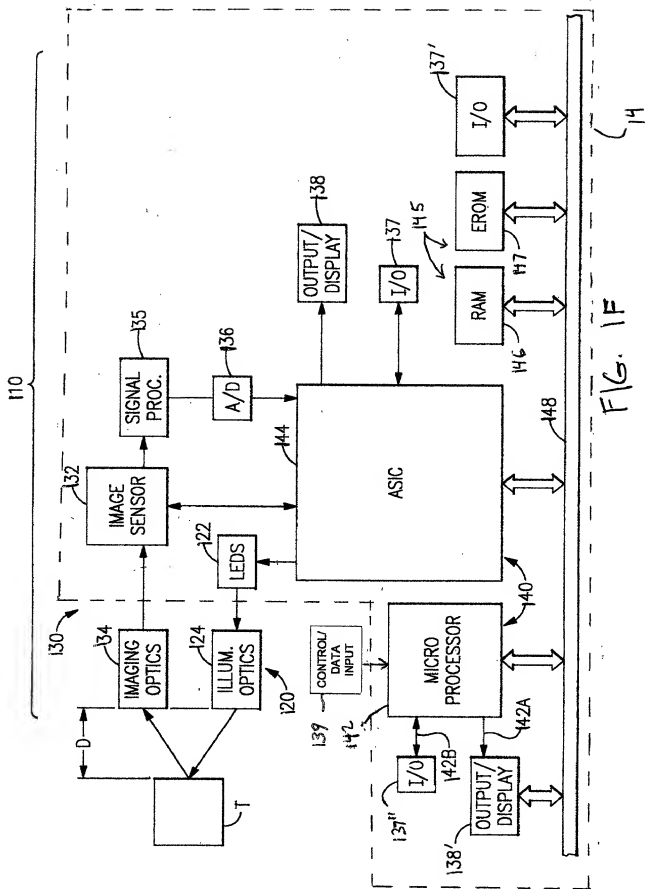

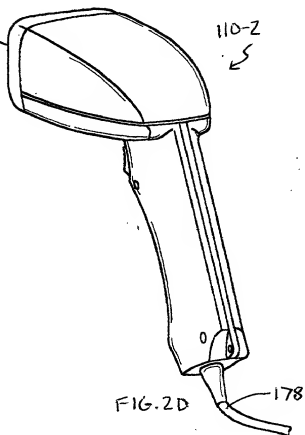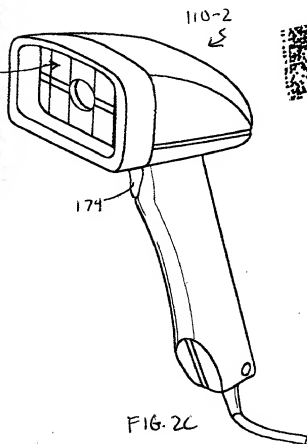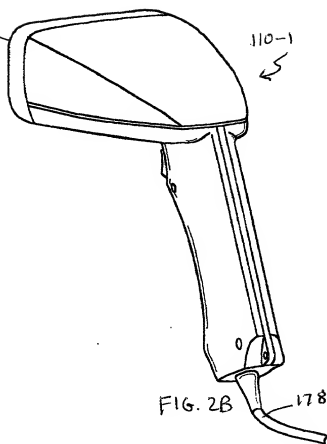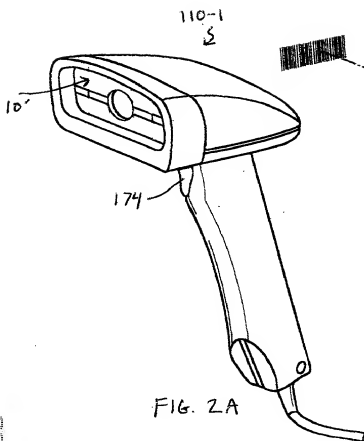

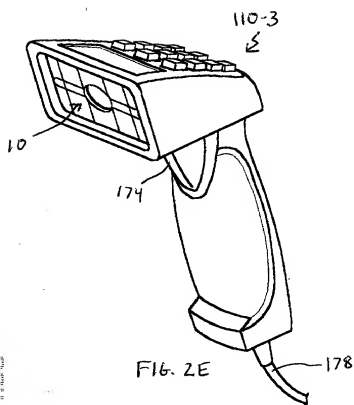


FIG. 2E

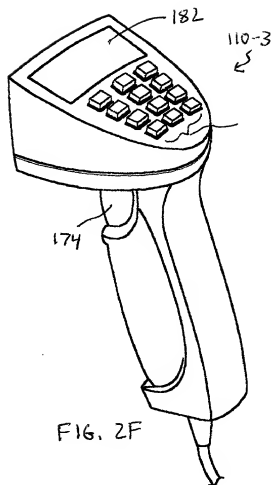


FIG. 2F

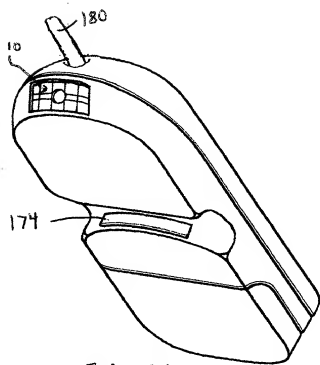


FIG. 2G

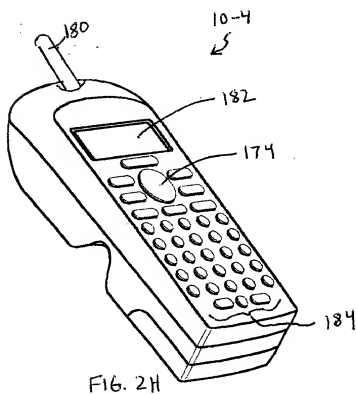
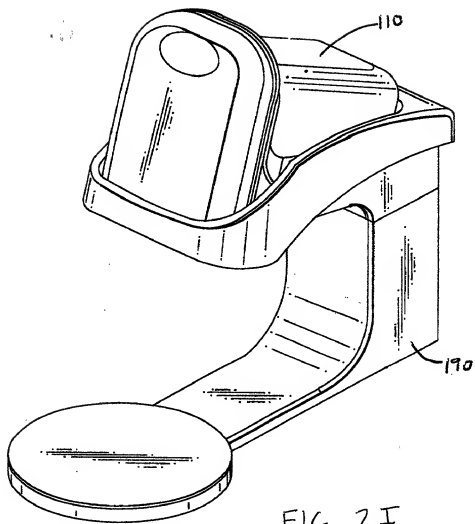


FIG. 2H






FIG. 1E

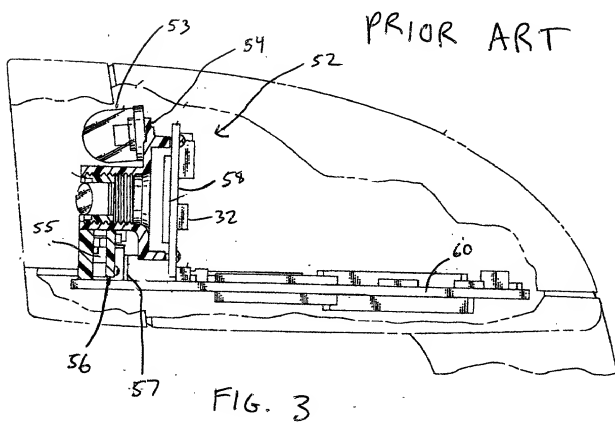


FIG. 3